


POE

It's applicable to the optical terminal to complete connection, distribution and dispatching between subscriber cables and optical fiber terminals, and is widely used for optical communication network projects.

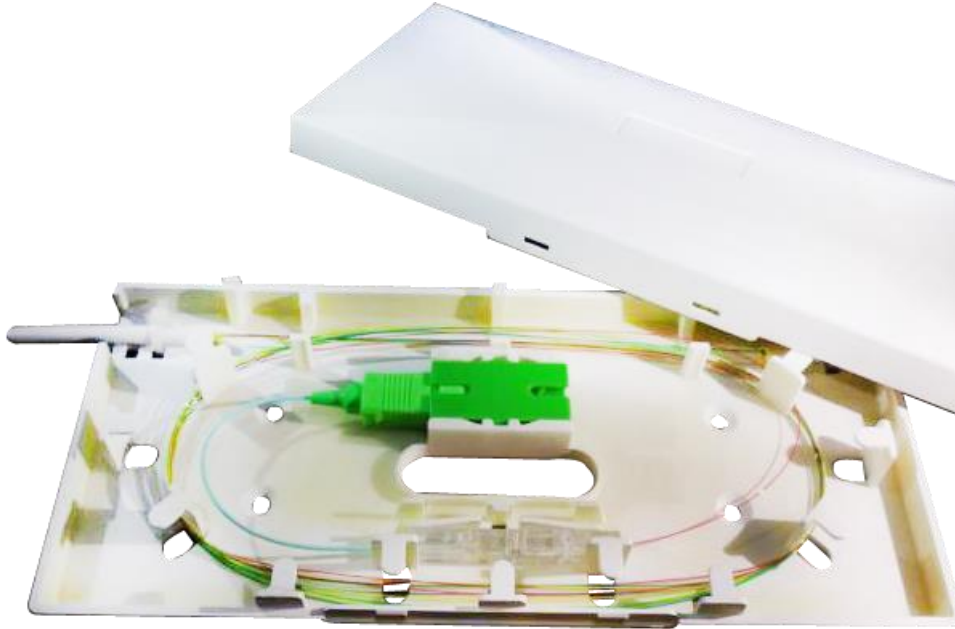

Feature

- It made of plastic , perfect appearance.
- Bow-type drop cable can be spliced or mechanically spliced or have a connector made on the field, and redundant length can be stored inside.
- Backbone fiber backup, reserved for future expansion.
- Perfect fiber route design to ensure bend radius of fibers.
- It can install 1 pcs SC/APC adapter
- It is suitable for wall-mounted

Dimension: WxLxH=120*70*25mm

Applications

- Telecommunications subscriber loop
- Fiber to the home (FTTH)