



SPL-FTTH

SPL-P01 Splitter Planar Lightwaver

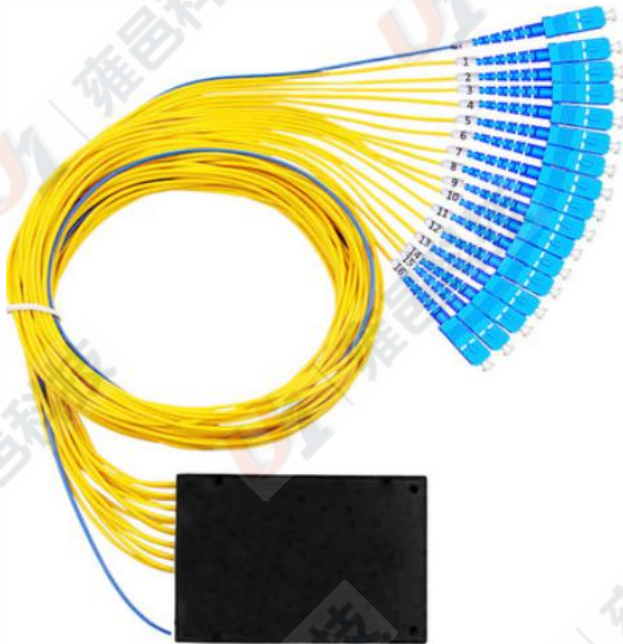

Model No.	SPL-P01
Type	1x2/x4/x8/x16/x32/64
Operating Wavelength	1260 ~ 1650(nm)
Return Loss(dB)	UPC≥50 APC≥55
Connector	SC/FC/LC Optional
Pigtail Length (m)	1.0(±0.1) or Customer Specified
Fiber	G657A or customized
Tail jacket color	Blue ,black or customized
Operating temperature	-40-85°C
Humidity	≤ 95%
Atmospheric Pressure	70-106Kpa




Can meet the transmission requirements of different wavelengths



Can evenly distribute light to customers



Compact structure, can be directly installed in the existing exchange box



Imported Kevlar wire, strong tensile strength

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com