



SPL-FTTH

SPL-C01 Splitter Planar Lightwave



Model No.	SPL-C01
Type	1x2/x4/x8/x16/x32
Operating Wavelength	1260 ~ 1650(nm)
Return Loss(dB)	UPC≥50 APC≥55
Connector	SC/FC/LC Optional
Directivity (dB)	≥55
Fiber	G657A or customized
PDL (dB)	0.3
Operating temperature	-40-85°C
Humidity	≤ 95%
Atmospheric Pressure	70-106Kpa

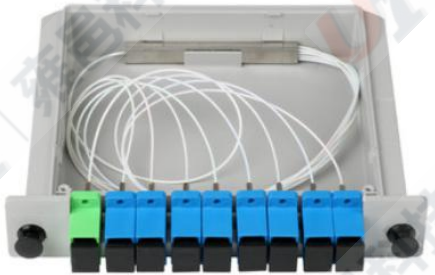

ABS plastic shell



High-quality chips



Low loss and good repeatability



Ceramic ferrule

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com