



FIC-FTTH

FIC-22 Field Installation Connector



Model No.	FIC-22
Insertion loss	≤0.30dB Max 0.5dB
Return loss	APC≥55dB UPC≥50dB
Tensile	ΔIL < 0.3dB @ 40N
Durability	> 500 times
Re-assembly	> 5 times
Cable scope	2.0mmX3.0mm Drop Cable
Humidity	≤ 95%
Operating temperature	-25-85°C
Atmospheric Pressure	70-106Kpa

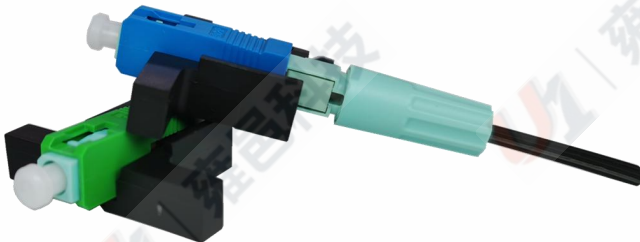

High fixed-length accuracy



High quality ceramic ferrule



Butterfly clasp design



Threaded tail sleeve design, easy to install



Packed in plastic bags for single use

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com