


# FIC-FTTH

FIC-20 Field Installation Connector




Model No.	FIC-20
Insertion loss	≤0.30dB Max 0.5dB
Return loss	APC≥55dB UPC≥50dB
Tensile	ΔIL < 0.3dB @ 40N
Durability	> 500 times
Re-assembly	> 5 times
Cable scope	2.0mmX3.0mm Drop Cable
Humidity	≤ 95%
Operating temperature	-25-85°C
Atmospheric Pressure	70-106Kpa



There is no need to unload the snap during field assembly



Precise cutting of fiber length

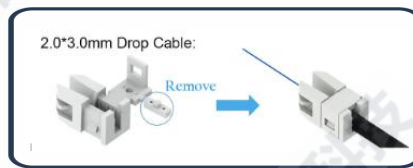

Snap-type design ensures sufficient tension



Provide the optical fiber micro-bending tolerance

**SHENZHEN U1**  
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,  
Changxing Hi-tech Industrial Park,  
Shajing Street, Baoan District,  
Shenzhen China 518104

**CALL: +86 0755 - 2667 3886**

Tel:+86 0755-2667 3886  
Fax:+86 0755-2682 1069  
Web: www.u1conec.com  
E-mail: admin@u1conec.com