



CABLE-FTTH


GJFJTC8Y Optical Fiber Cable

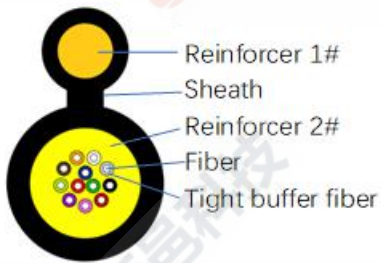

Model NO.	GJFJTC8Y
Fiber type	9/125, 50/125,62.6/125
Sheath color	Black
Sheath material	PE
Cable dimension (mm)	4.2-8.5, Tolerance±0.1
Cable weight (Kg/km)	19-40
Min. bending radius (mm)	30 (Static) 15(Dynamic)
Attenuation (dB/km)	≤ 0.4 at 1310nm ≤ 0.3 at 1550nm



- 1 Small outer diameter, light weight



- 1 Standard core can be directly apply to connectors, to use for device connecting.



- 1 Aramid stranded wire has extremely high tensile strength, convenient for self-supporting;
- 2 Air-mounting.

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com