

# CABLE-FTTH

GYFY Optical Fiber Cable



**DUST-PROOF**


**RoHS COMPLIANT**  
RoHS

**WATER-PROOF**


**WORKING AT HEIGHTS**

**HIGH TEMPERATURE**


**WALL-HUNG TYPE**

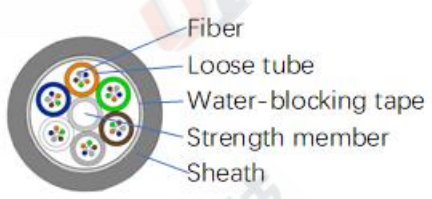


Model NO.	GYFY
Fiber type	9/125, 50/125, 62.5/125
Sheath color	Black or Customized
Sheath material	PE
Cable dimension (mm)	9.5, Tolerance±0.1
Cable weight (Kg/km)	80
Min. bending radius (mm)	30 (Static) 15(Dynamic)
Attenuation (dB/km)	≤ 0.4 at 1310nm ≤ 0.3 at 1550nm



- 1 Special filling gel filled loose tubes provide perfect optical fiber protection.
- 2 Water block.



- 1 (FRP) as central strength member gives high tensile strength



- 1 All dielectric structure, light weight, easy installation.
- 2 Aerial , Duct.

**SHENZHEN U1**  
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,  
Changxing Hi-tech Industrial Park,  
Shajing Street, Baoan District,  
Shenzhen China 518104

**CALL: +86 0755 - 2667 3886**

Tel:+86 0755-2667 3886  
Fax:+86 0755-2682 1069  
Web: www.u1conec.com  
E-mail: admin@u1conec.com