
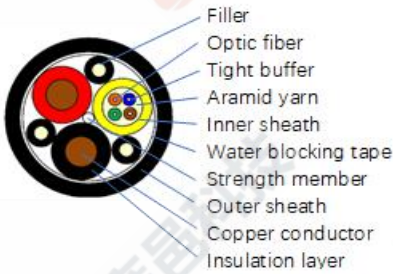


# CABLE-FTTH

GDPFH-4B6+2×4MM2 Optical Fiber Cable

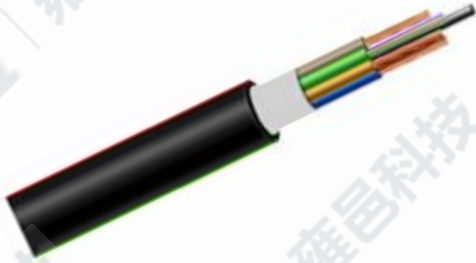

**DUST-PROOF**

**RoHS COMPLIANT**  
RoHS

**WATER-PROOF**

**WORKING AT HEIGHTS**


**HIGH TEMPERATURE**

**WALL-HUNG TYPE**

Model NO.	GDPFH-4B6+2×4MM2
Fiber type	G657
Sheath color	Black
Sheath material	LSZH
Cable dimension (mm)	13.0, Tolerance±0.1
Operation temperature (°C)	-20~+60
Min. bending radius (mm)	20 (Static) 10(Dynamic)
Attenuation (dB/km)	≤ 0.4 at 1310nm ≤ 0.3 at 1550nm



- 1 Good uniformity of the outer diameter of tight buffer fiber.
- 2 Easy to strip.

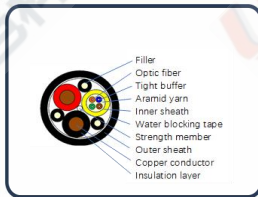

- 1 Highly flexible construction allows for multiple deployments.



- 1 Good bending performance

**SHENZHEN U1**  
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,  
Changxing Hi-tech Industrial Park,  
Shajing Street, Baoan District,  
Shenzhen China 518104

**CALL: +86 0755 - 2667 3886**

Tel:+86 0755-2667 3886  
Fax:+86 0755-2682 1069  
Web: www.u1conec.com  
E-mail: admin@u1conec.com