



CABLE-FTTH

GJXH- I Optical Fiber Cable



Model NO.	GJXH- I
Fiber type	9/125(G657A1/G657A2)
Sheath color	Black/White/Grey
Sheath material	LSZH
Cable dimension (mm)	2.0*1.6, Tolerance±0.1
Operation temperature (°C)	-20~+60
Min. bending radius (mm)	15 (Static) 30(Dynamic)
Attenuation (dB/km)	≤ 0.4 at 1310nm ≤ 0.3 at 1550nm

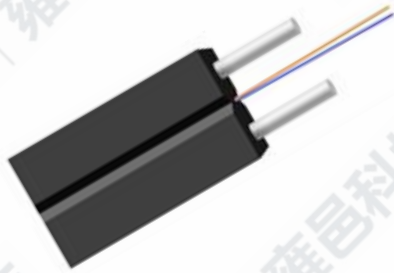

- 1 Groove design, easily strip and splice.
- 2 simplified installation and maintenance.
- 3 higher tensile strength.



- 1 Suitable for all kinds of connectors
- 2 Can make patchcord and pigtail.



- 1 Used in indoor cabling, especially used for FTTH.
- 2 Used as access building cable.

SHENZHEN U1
TELECOMMUNICATIONS CO.,LTD

6th Floor, Building 1,
Changxing Hi-tech Industrial Park,
Shajing Street, Baoan District,
Shenzhen China 518104

CALL: +86 0755 - 2667 3886

Tel:+86 0755-2667 3886
Fax:+86 0755-2682 1069
Web: www.u1conec.com
E-mail: admin@u1conec.com